




# HDR HEAVY DUTY STATION FOR ROBOT

# **HDR / HEAVY DUTY STATION FOR ROBOT**




<sup>\*</sup>Download the Robot Comunication Protocol at http://www.jbctools.com/downloads.html


## **INSTALLATION**

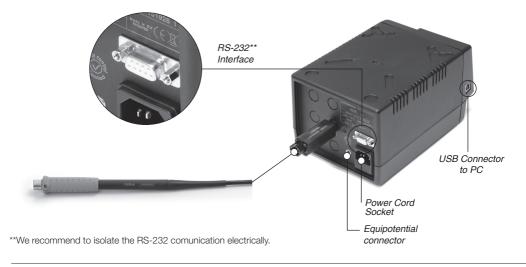



# **CONTROL SCREEN**

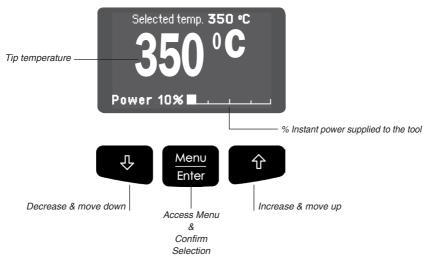

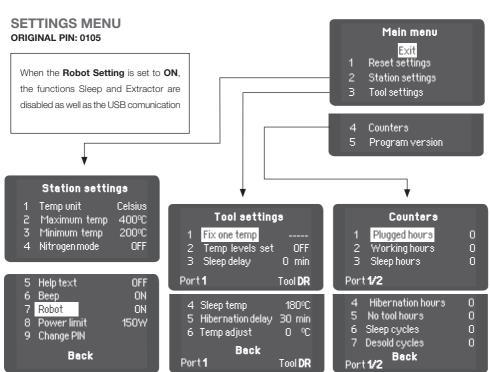

### **TECHNICAL SPECIFICATIONS**

- Temperature selection from 90°C (190°F) to 500°C (932°F) (±5%).
- Output Peak Power: 250W
- Safety transformer, mains separator and double isolation.
- HDR-2B 230V 50/60Hz. Input fuse: 2A. Output: 47V.
- HDR-1B 120V 50/60Hz. Input fuse: 4A. Output: 47V.
- HDR-9B 100V 50/60Hz. Input fuse: 4A. Output: 47V.
- Total weight of unit: 5.9Kg (13.1lb)
- Complies with CE standards on electrical safety, electromagnetic compatibility and ESD protected housing "skin effect".
- RoHS compliant.
- Equipotential connector and the tool tip are connected to station mains ground supply for ESD protection.



This product should not be thrown in the garbage.



### WARRANTY

JBC's 2 years warranty guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this fully filled in, sheet.

SERIAL N°
STAMP OF DEALER
DATE OF PURCHASE